

HID

FollowSpot HID 2500W

16° ÷ 24°

cod. TH1342




FEATURES:

- Follow spot 2500W 16°-24°
- For HMI 2500W G38 socket lamp (537LA)
- Color temperature 6000 K
- Input: 230Vac 50/60Hz 15A
- Optics with 4 lens, high performance double condenser optical system
- Adjustable zoom from 16° to 24°
- Manual zoom and focus
- Mechanical blackout
- Iris accessory included (AC837)
- Profile system with 4 steel shutter blades included
- Color holder for 6 filters included
- Gobo holder optional (AC819)
- Aluminium and steel plate body. Scratch resistant black epoxy powder paint
- External ballast
- IP20
- Insulation class I



Followspot 2500 16°-24° for G38 2500W HMI lamp, flat field projection, ideal for use in medium-large-scale venues. It features a user friendly side and back handle, strong mechanics with extruded aluminium and steels plate body. Excellent light beam thanks to high-quality optics by Arena Luci, with adjustable double condenser lens system. Suitable for theaters, television studios and photographic studios.

Adjustable beam opening from 16° to 24° through the lens slide, perfect focus with the same system and adjustment of softness of beam boundary. Iris is included, profile system with four steel shutter blades is included, mechanical blackout integrated, color holder for 6 filters is included. Optional Gobo holder (AC819).

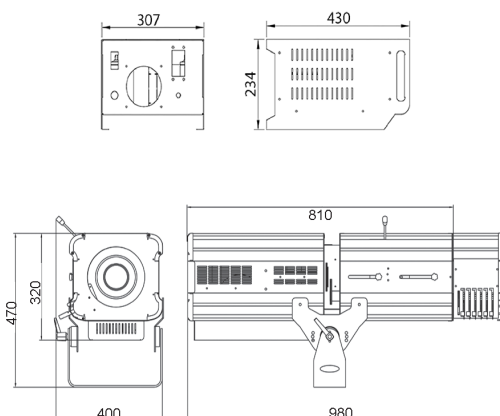

LUX 16°	31920	7980	3547	1995	1277
LUX 24°	21067	5267	2341	1317	843
∅	5m	10m	15m	20m	25m
∅	2,13m	4,25m	6,38m	8,50m	10,63m
∅	1,41m	2,81m	4,22m	5,62m	7,03m

Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso
 Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice