



# **XPRS215S**

**XPRS Series** 

### **DUAL 15-INCH SUBWOOFER**

Get the audience going with the XPRS Series of high-powered active speakers. The compact, portable, wooden enclosure XPRS Series combines Pioneer Pro Audio sound engineering heritage with the reliable, energy efficient power of Powersoft amps - to give you a versatile plug-and-play system that fills the room with a natural sound.

### **KEY FEATURES**

- Dual 15-inch loaded subwoofer with a quick, powerful bass response
- Powersoft Class D 2400 W amps for reliable, ۰ high-powered performance
- Advanced protection features help prolong your speakers' life
- Crossover and Phase switches deliver instant control of your DSP settings
- Multiple inputs and outputs for flexible, easy set-up
- Impact resistant textured paint finish
- Compact, robust and highly portable with removable castors




### **SPECIFICATIONS**

Speaker type	Dual 15" subwoofer, bi-amp, active speaker
Frequency response (-10 dB)	40 Hz to 160 Hz
Dispersion (H × V)	· ·
Maximum SPL (peak@1m/1w)	135 dB (Half space)
Crossover frequency	5
Amplifier type	Class D
Power rating	2400 W peak / 1200 W cont. (600 W × 2)
Input connectors	2 × XLR/TRS combo (balanced)
Input impedance	10 kΩ
Output connectors	2 × Through output XLR (balanced)
LF driver	2 × 15-inch LF cone driver
HF driver	
Enclosure	15 mm birch plywood, bandpass type
Finish	Impact-resistant, black semi-matt textured
Handle	4 (on both sides)
Pole socket	35 mm socket (0°/7° multi-angle)
Rigging point	M20 screw socket
Amplifier protection	Thermal limiting, over-temperature muting, output overcurrent
Driver protection	DC offset removal, high frequency stationary loud signals, input voltage limiter (Peak/RMS)
Power unit Protection	Primary AC mains overvoltage protection, Primary AC mains overcurrent protection
Supported voltages	100 V (50 Hz/60 Hz) / 110 V to 240 V (50 Hz/60 Hz)
Power consumption	240 W
Dimensions ( $W \times H \times D$ )	743 × 524 × 811 mm (29.3 × 20.6 × 31.9 inch)
Weight	55.9 kg (123.2 lbs)

WWW.PIONEERPROAUDIO.COM



## XPRS215S

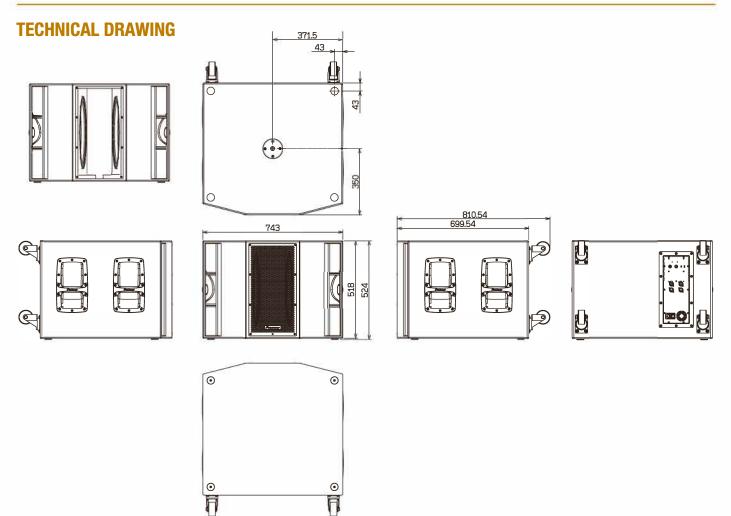

### **APPLICATION**

### Clubs / Bars / Houses of Worship / Live sound

# IMAGES

### **AMPLIFIER MODULE**



### WWW.PIONEERPROAUDIO.COM

AlphaTheta EMEA Limited Artemis Building, Odyssey Business Park, West End Road, South Ruislip, Middlesex, HA4 6QE, UK AlphaTheta Music Americas, Inc 2050 W 190th Street, Suite #109, Torrance, CA 90504, USA AlphaTheta Corporation 6F, Yokohama i-Mark Place, 4-4-5 Minatomirai, Nishi-ku, Yokohama, Kanagawa 220-0012 Japan

Features and specifications of the products described or illustrated in this specification sheet are correct at the time of printing but could change as production changes might occur. This specification sheet may contain typographical errors and the colours of the depicted products may deviate slightly from reality. Consult your Pioneer dealer to ensure that actual features and specifications match your requirements. This specification sheet may contain references to products that may or will not be available in your country.